onsite HIGH VOLTAGE

DS110os

PD Test and Diagnosis Measurement
110 kV PD Range Extender for off shore applications

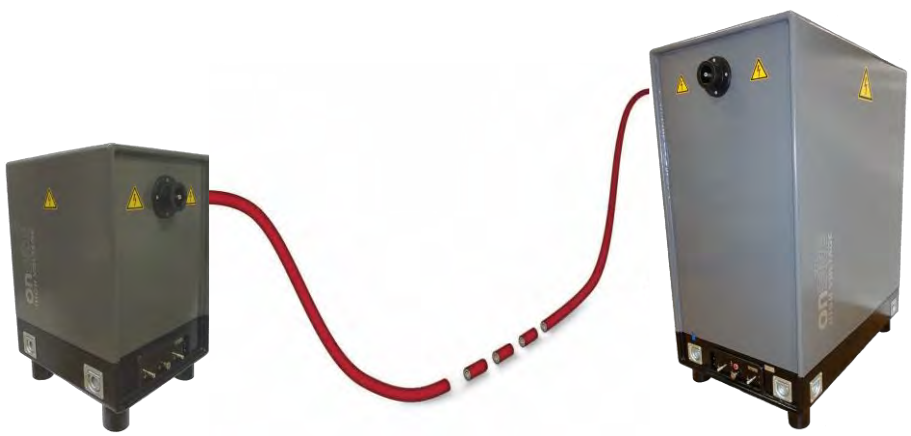

HV110os-ds
(near end / master)

DS110os
(far end / slave)

realDAC® HIGH VOLTAGE

Efficient, integrated diagnostics, comprehensive results

- ✓ Double side PD testing and diagnosis for long transmission cable circuits
- ✓ Improvement of over-all PD measurement performance up to 200 %
- ✓ High sensitive PD measurement with automatic real-time PD localisation
- ✓ Fully integrated advanced PD diagnosis for a complete cable condition picture
- ✓ Simple setup with intelligent intercommunication and synchronisation

Technical Data DS110os

Applicable for DAC systems	110 kV_{peak}
Frequency range damped AC	10 Hz … 800 Hz
PD measuring range	1 pC … 150 nC
PD measuring bandwidth	Acc. to IEC 60270
PD localisation bandwidth	150 kHz … 50 MHz, wide range automatic bandwidth adaptation for short and long cables
PD measuring accuracy	1 pC
PD localisation accuracy	1.0 m down to 0.1 m
TDR joint localisation in calibration mode	Integrated
Analysis software	DAC Explorer software, comprehensive viewing, processing, analysing and reporting of measurement data
Power supply	Single phase AC 110 … 240 VAC 48 … 63 Hz, 100 VA Optional: 12 VDC
Ambient temperature (operating)	-25 °C … +65 °C, 95%, non-condensing
Net weight	approx. 46 kg
Dimensions	width/depth 630/685 mm H 930 mm

improvements to specifications are subject to change without notice

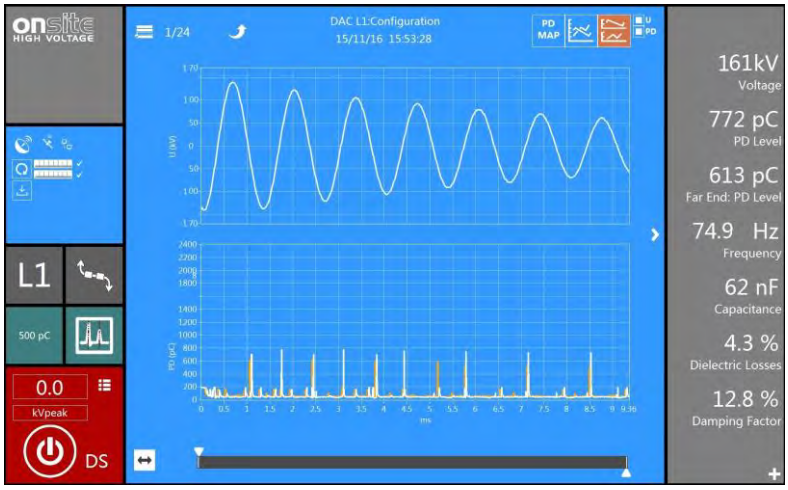

Master screen with far end PD signal (orange)

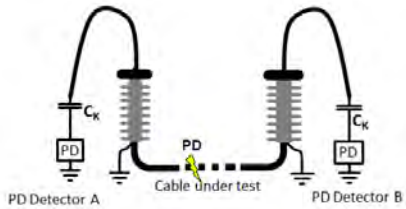

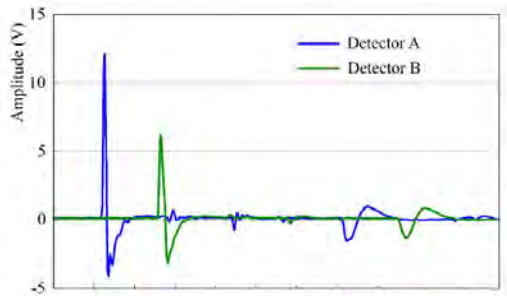

Applications

- Capable of performing all necessary on-site tests and measurements on all types of power cables
- After-laying testing of newly installed or repaired cable systems
- Testing in line with IEC 60840, IEEE 400 and CENELEC HD 632 S2
- Routine testing and diagnostics for assessment of service-aged cables
- PD monitored voltage withstand testing and non-destructive diagnostic testing
- Comprehensive PD measurement capabilities according to IEC 60270, IEC 60885-3, IEEE 400.3

Features

- DS110os extends the products line of onsite high voltage DAC solutions
- PD monitored withstand test by applying damped AC (DAC) voltage
- Compatible with single side DAC systems up to 110 kV_{peak}
- Measurement of PD level, PD inception and PD extinction voltage
- Multiple PD spot localisation in cable insulation and accessories
- Phase resolved PD analysis
- The solution consists of a DAC master unit and a DS110 unit and all needed connection cables
- The master* DAC unit controls fully automatic the complete measurement setup as a single appliance

* Master DAC unit need "ds" option

onsite high voltage group
Töpferstrasse 5 CH-6004 Luzern Phone +41 41 500 51 20 Fax +41 41 500 05 51 info@onsitehv.com www.onsitehv.com